


CM19 Brown

General Description

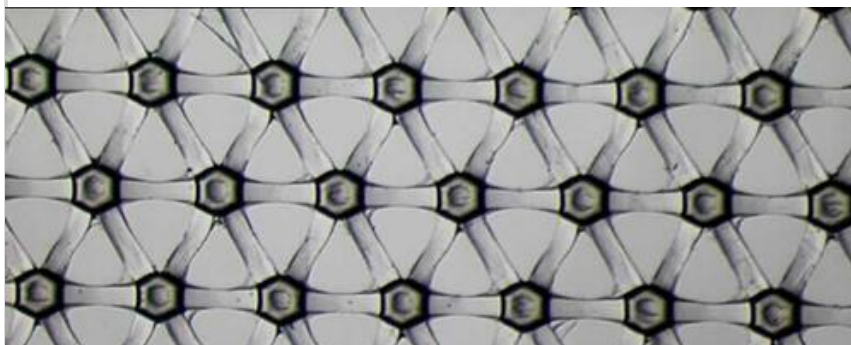

Description

- A brown polyethylene net with a thin lower melting bonding layer.

Processing

- Co-extruded nets are designed for use in heat lamination processes.

Applications

- Woundcare dressings requiring a laminated pad with low adherence characteristics.
- First aid dressings
- General lamination

Typical Property	Typical Value
Thickness (micron)	110
Film Weight (g/m ²)	19
Boss Count (MD) (per 25.4mm)	20
Boss Count (TD) (per 25.4mm)	35
Tensile Strength MD (gf/cm)	700
Tensile Strength TD (gf/cm)	500
Nominal Length (lm)	1650
Min Length (lm)	1000
Minimum Width (mm)	50
Maximum Width (mm)	1200

Product Information revised 10th September 2015

All statements, product characteristics, and performance data contained herein are believed to be reliable based on observation and testing, but no representations, guarantees, or warranties of any kind are made as to accuracy, suitability for particular applications, or the results to be obtained. Nothing contained herein is to be considered to be permission or a recommendation to use any proprietary process or technology without permission of the owner. No warranty of any kind, expressed or implied, is made or intended.

SWM INTL

Broad Lane • Gilberdyke • East Yorkshire • HU15 2TD
+44 (0) 1430 440757 • ams@swmintl.com • <https://productfinder.swmintl.com>