


4.0NPET-C/C



General Description

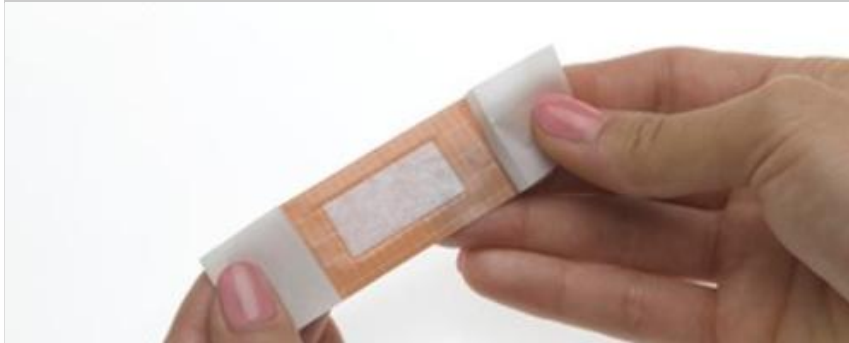

Absorbent Pad (135.6gsm) with a X550NAT-E (15.6gsm Delnet) bonded to both top and bottom of the pad.

Typical Property	Typical Value
Delnet Fracture (MD) (g/cm)	714.318
Slit Width (mm)	1473.2
Absorptive Rate (sec)	1
Absorptive Capacity (g/m ²)	1084.984
Thickness (microns)	1320.8
Length (metres)	365.76

Product Information revised 26th June 2019

All statements, product characteristics, and performance data contained herein are believed to be reliable based on observation and testing, but no representations, guarantees, or warranties of any kind are made as to accuracy, suitability for particular applications, or the results to be obtained. Nothing contained herein is to be considered to be permission or a recommendation to use any proprietary process or technology without permission of the owner. No warranty of any kind, expressed or implied, is made or intended.

SWM INTL

Broad Lane • Gilberdyke • East Yorkshire • HU15 2TD
+44 (0) 1430 440757 • ams@swmintl.com • <https://productfinder.swmintl.com>